



شرکت پرداخت الکترونیک سامان

تنظیمات سیم کارت بر روی کارتهخوان

NewLand N910




تاریخ ویرایش : 98/05/06


تهیه کننده : واحد عملیات فناوری اطلاعات

1. تنظیمات کارتخوان N910


1.1. منو Setting را انتخاب نمایید.

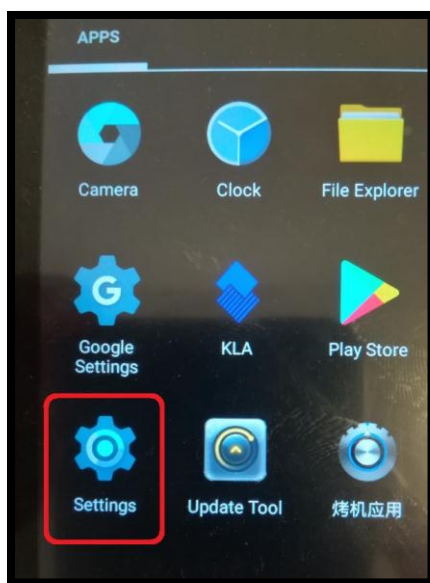


1.2. گزینه Cellular networks را انتخاب نمایید.

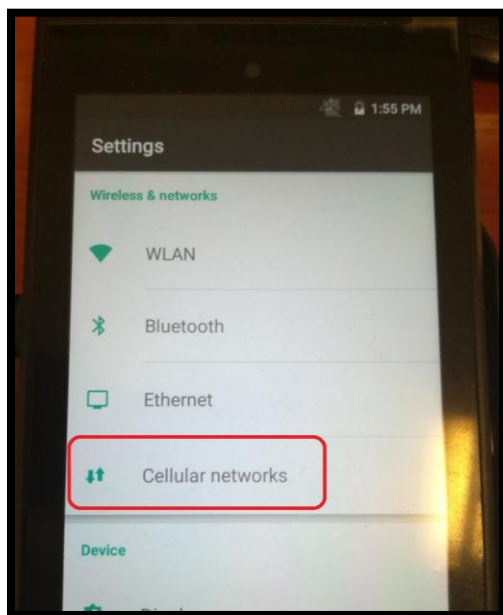


1.3. گزینه Access Point Names را انتخاب نمایید.

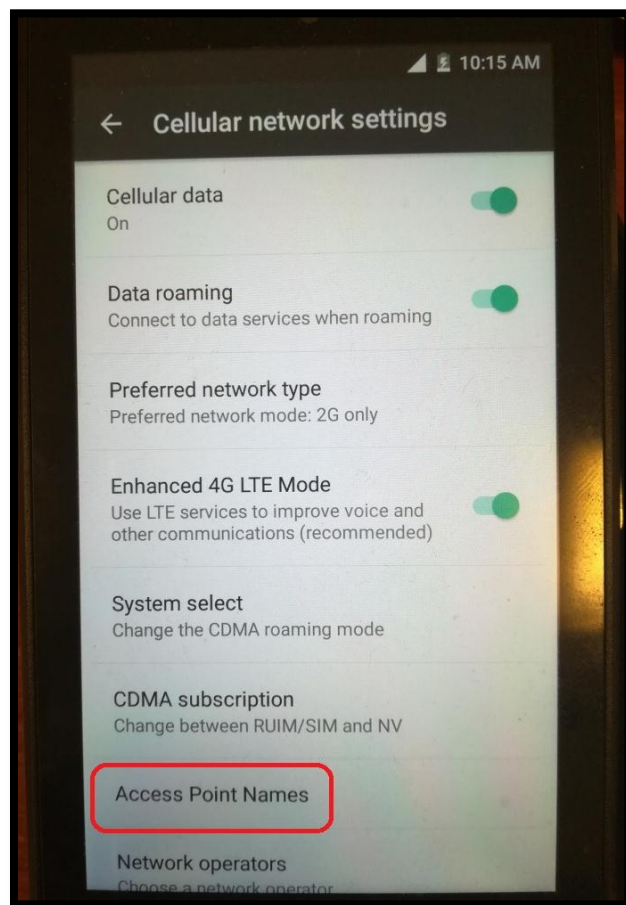



1.4. آیکون + را انتخاب نمایید.

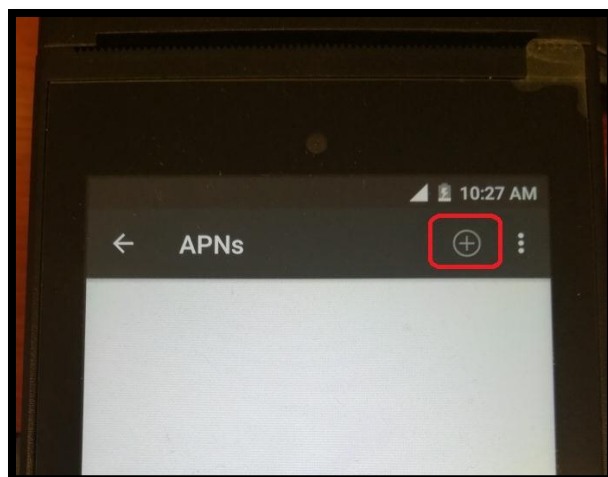

توجه: بسته به نوع سیم کارت (APN MCI, Rightel, ...) در منو Edit access point تنظیمات ذیل می‌بایست وارد گردد.

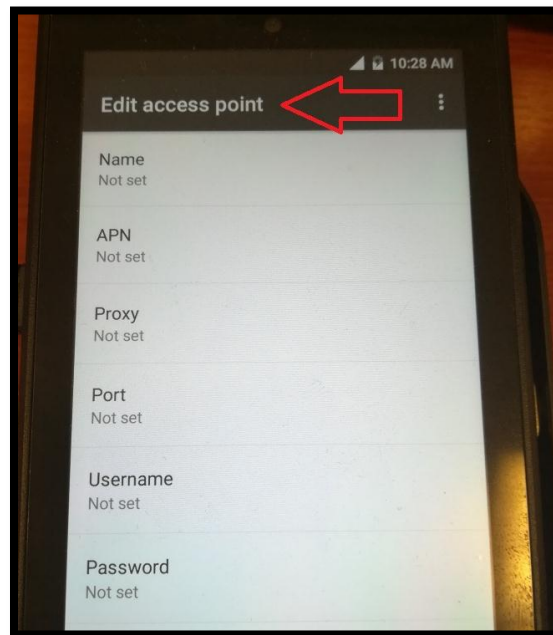

2. سیم کارت Rightel

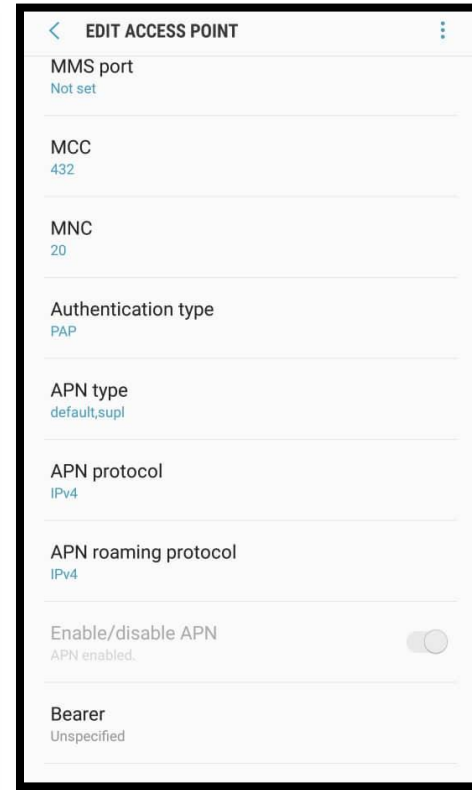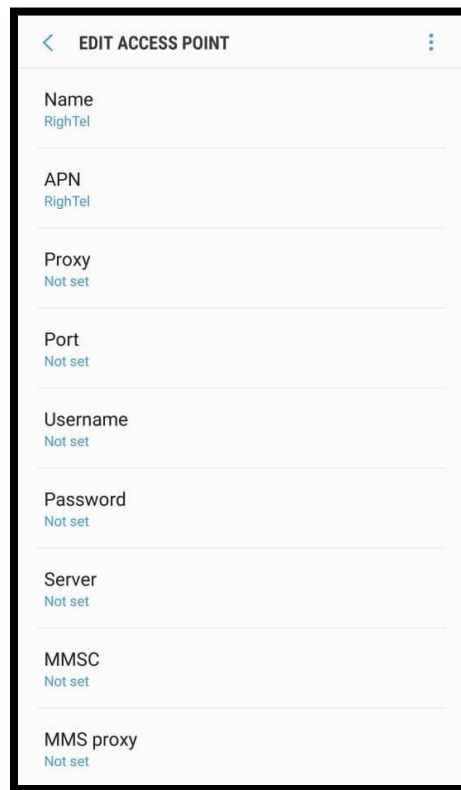

در منو " تنظیمات IP سوئیچ " برنامه N910 تنظیمات مطابق تصویر وارد گردد.

The screenshot shows a configuration window for a switch. It contains four input fields: 'Switch IP' with the value '91.240.180.181', 'Switch Port' with the value '5000', 'Config IP' with the value '91.240.180.190', and 'Config Port' with the value '19000'. Below each IP field is a red text label 'مثال : 192.168.10.2'. At the bottom, there are two buttons: a red one labeled 'انصراف' (Cancel) and a blue one labeled 'تایید' (Confirm).

3. سیم کارت MCI

The screenshot shows the 'Edit access point' screen for 'MCI-MMS'. It lists various settings: Name (MCI-MMS), APN (mcinet), Proxy (Not set), Port (Not set), Username (Not set), Password (Not set), Server (Not set), MMSC (http://192.168.193.134:38090/was), MMS proxy (192.168.194.073), MMS port (8080), and MCC (432).

The screenshot shows the 'Edit access point' screen for 'MCI-MMS', displaying additional settings: MMS port (8080), MCC (432), MNC (11), Authentication type (Not set), APN type (mms), APN protocol (IPv4), APN roaming protocol (IPv4), APN enable/disable (APN enabled, with a toggle switch), Bearer (Unspecified), MVNO type (None), and MVNO value (Not set).

تنظیمات IP سوئیچ سیم کارت MCI :

بوابات الانترنت

Switch IP: 91.240.180.181
مثال : 192.168.10.2

Switch Port: 5000

Config IP: 91.240.180.190
مثال : 192.168.10.2

Config Port: 19000

التصريف تاييد

4. سیم کارت APN MCI

Edit access point

Name
MCI-GPRS

APN
mcinet

Proxy
192.168.194.73

Port
8080

User name
Not set

Password
Not set

Server
Not set

Edit access point

MMSC
Not set

MMS proxy
Not set

MMS port
Not set

MCC
432

MNC
11

Authentication type
PAP

APN type
default,supl

 Edit access point

MCC	432	>
MNC	11	>
Authentication type	PAP	>
APN type	default,supl	>
APN protocol	IPv4	>
Enable/disable APN	APN enabled	☒
Bearer	Unspecified	>

تنظیمات IP سوئیچ سیم کارت APN MCI :

11:28 AM

Switch IP

172.17.11.250

مثال : 192.168.10.2

Switch Port

6000

Config IP

172.17.11.252

مثال : 192.168.10.2

Config Port

19000

انصراف

تایید

دریافت بیکریندی

 Edit access point

Name	Irancell-GPRS
APN	mt nirancell
Proxy	10.131.26.138
Port	8080
User name	Not set
Password	Not set
Server	Not set

 Edit access point

MMSC	Not set
MMS proxy	Not set
MMS port	Not set
MCC	432
MNC	35
Authentication type	PAP
APN type	default,supl

 Edit access point

MCC	432	>
MNC	35	>
Authentication type	PAP	>
APN type	default,supl	>
APN protocol	IPv4	>
Enable/disable APN	APN enabled	☒
Bearer	Unspecified	>

تنظیمات IP سوئیچ سیم کارت APN IR :

Switch IP

192.168.1.98

مثال : 192.168.10.2

Switch Port

6000

Config IP

172.31.19.19

مثال : 192.168.10.2

Config Port

19000

انصراف

تایید

دریافت بیکریندی